


永茂建机  
YONGMAO

STT113  
6t

平頭系列

STT113  
6t

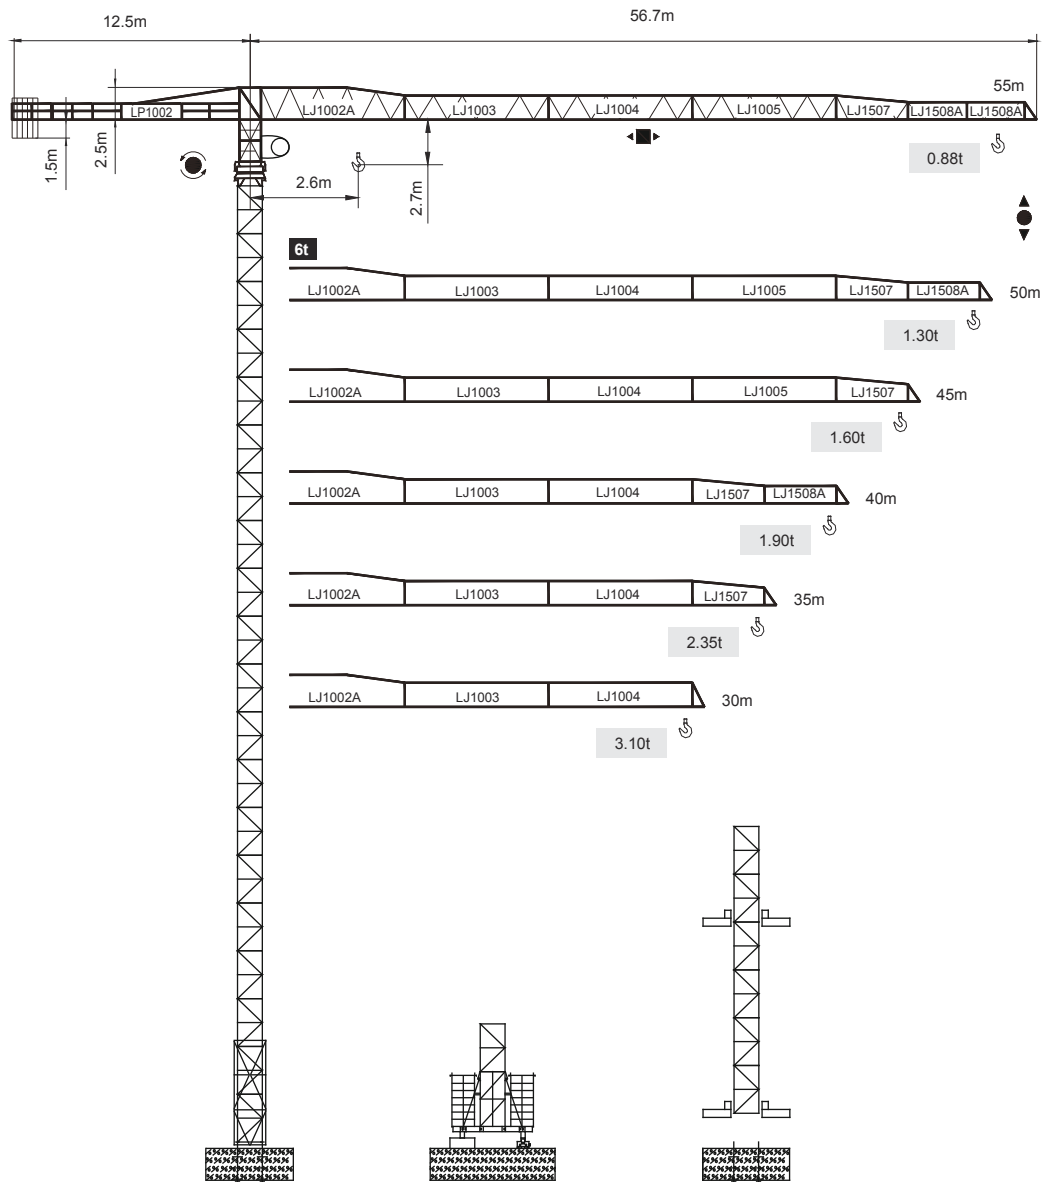



FEM

Topless

V 5.0-02282018

載荷表 Load Chart

|       |         | R-6-A(B)-2-V1.0           |                      |      |      |      |      |      |      |      |
|-------|---------|---------------------------|----------------------|------|------|------|------|------|------|------|
| R (m) | 倍率 Fall | R (C <sub>max</sub> ) (m) | C <sub>max</sub> (t) | 25   | 30   | 35   | 40   | 45   | 50   | 55   |
| 55    |         | 12.37                     | 6.00                 | 2.57 | 2.03 | 1.65 | 1.37 | 1.15 | 0.97 | 0.83 |
|       |         | 22.29                     | 3.00                 | 2.61 | 2.07 | 1.69 | 1.41 | 1.19 | 1.02 | 0.88 |
| 50    |         | 14.43                     | 6.00                 | 3.13 | 2.49 | 2.05 | 1.71 | 1.46 | 1.25 |      |
|       |         | 26.18                     | 3.00                 | 3.00 | 2.54 | 2.09 | 1.76 | 1.50 | 1.30 |      |
| 45    |         | 15.06                     | 6.00                 | 3.30 | 2.64 | 2.17 | 1.82 | 1.55 |      |      |
|       |         | 27.38                     | 3.00                 | 3.00 | 2.68 | 2.22 | 1.87 | 1.60 |      |      |
| 40    |         | 15.24                     | 6.00                 | 3.35 | 2.68 | 2.20 | 1.85 |      |      |      |
|       |         | 27.72                     | 3.00                 | 3.00 | 2.73 | 2.25 | 1.90 |      |      |      |
| 35    |         | 15.75                     | 6.00                 | 3.49 | 2.79 | 2.30 |      |      |      |      |
|       |         | 28.67                     | 3.00                 | 3.00 | 2.84 | 2.35 |      |      |      |      |
| 30    |         | 17.12                     | 6.00                 | 3.86 | 3.10 |      |      |      |      |      |
|       |         | 30.00                     | 3.00                 | 3.00 | 3.00 |      |      |      |      |      |

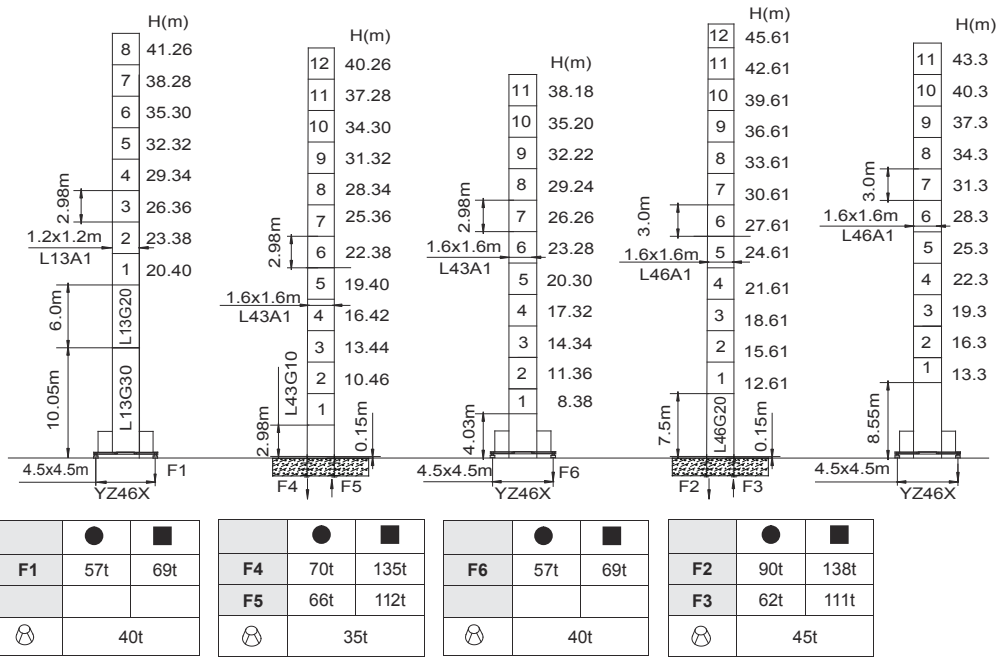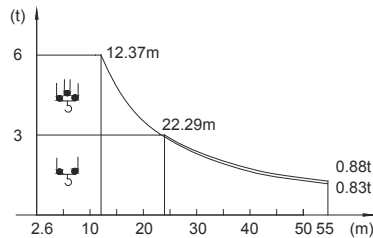

● 工作狀態支反力 In service reaction    ■ 非工作狀態支反力 Out of service reaction  
⊗ 整機自由高度重量 (不含平衡重及壓重重量) Total weight of free standing crane (excludes counter weight & ballast.)

Topless STT113







YONGMAO HOLDINGS LIMITED



YONGMAO HOLDINGS LIMITED

# STT113

6t

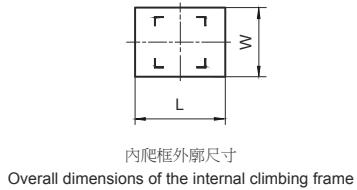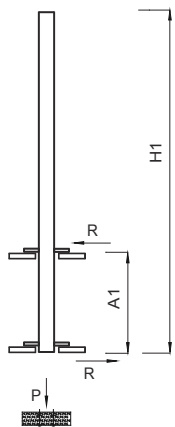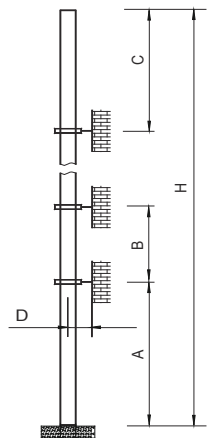

| 塔身節<br>Mast | A<br>(m) | B<br>(m) | C<br>(m) | D<br>(m) | H<br>(m)      |
|-------------|----------|----------|----------|----------|---------------|
| L13A1       | 28.5     | 18       | 23.8     | >3       | 180<br>>180 * |
| L43A1       | 32       | 21       | 29.3     | >3.2     | 200<br>>200 * |
| L46A1       | 36       | 24       | 33.4     | >3.2     | 200<br>>200 * |

| 塔身節<br>Mast | H1<br>(m) | A1<br>(m) | P<br>(t) | R<br>(t) | X<br>(m) | Y<br>(m) | L<br>(m) | W<br>(m) |
|-------------|-----------|-----------|----------|----------|----------|----------|----------|----------|
| L13A1       | 29.61     | 12        | 50       | 18       | 2.58     | 2.17     | 2.78     | 3.29     |
| L43A1       | *         | *         | *        | *        | *        | *        | *        | *        |
| L46A1       | 53.9      | 16        | 78       | 20       | 3.28     | 2.4      | 3.5      | 3.02     |

附著道數 Number of tie collars  $= (H-A-C)/B+1$

超過100m高度，需降低載荷，請與公司聯繫。 Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

## 主要性能參數 Specifications

| 機構<br>Mechanism                                                                     |           |  |     |  |     |  | 電動機 Motor<br>kW |
|-------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------|-----------------|
|                                                                                     |           | m/min                                                                               | t   | m/min                                                                               | t   |                                                                                       |                 |
|  | 24YQL15 ☆ | 0 – 8.0                                                                             | 3.0 | 0 – 4.0                                                                             | 6.0 | 390m                                                                                  | 24/24/5.4       |
|                                                                                     |           | 0 – 40                                                                              | 3.0 | 0 – 20                                                                              | 6.0 |                                                                                       |                 |
|                                                                                     |           | 0 – 80                                                                              | 1.5 | 0 – 40                                                                              | 3.0 |                                                                                       |                 |
|                                                                                     | 24LFV15   | 0 – 40                                                                              | 3.0 | 0 – 20                                                                              | 6.0 | 400m<br>>400m *                                                                       | 24              |
|                                                                                     |           | 0 – 48                                                                              | 1.5 | 0 – 24                                                                              | 3.0 |                                                                                       |                 |
|                                                                                     |           | 0 – 80                                                                              | 0.9 | 0 – 40                                                                              | 1.8 |                                                                                       |                 |
|  | DTC55     | 0 – 57 m/min                                                                        |     |                                                                                     |     | 55 N·m                                                                                |                 |
|  | RTC95     | 0 – 0.7 rpm                                                                         |     |                                                                                     |     | 95 N·m                                                                                |                 |
|  | RT        | 12.5 – 25 m/min                                                                     |     |                                                                                     |     | 2x2.6/5.2                                                                             |                 |

| 電壓 Pressure        | kVA |
|--------------------|-----|
| 380V (± 10%) 50 Hz | 40  |

\* 與製造商聯繫 Contact us, please.  
☆ 标准配置 Standard configuration.

本技術參數不受法律約束，技術資訊請詳見相應說明書。  
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

平頭系列

051 052

Topless STT113  
Topless STT113



YONGMAO HOLDINGS LIMITED